



Optimal

optimal 1700



Tree Spade



Requirements for Power Unit:

A Wheel Loader, Skid Steer Loader, Telescopic Loader

1 extra hydraulic circuit, double-acting, for implement attachment at front

- hydraulic working pressure 160 - 200 bar (2,300-2,900 lbs./in²)
- oil flow 50-80 l per minute (13-22 GPM)
- tipping load approx. 8.500 kg (18,700 lbs.)
- lift capacity approx. 5.000 kg (11,000 lbs.)
- type of attachment quick-change frame or frame for fixed attachment
- controls: electro-hydraulic valves rotary control switch

B truck

- Wheel formula: 4x 4
- Payload: 6.800 kg (14,960 lbs.)
- Permissible rear axles load, min.: 10.000 kg (22,000 lbs.)
- Permissible gross weight min.: 15.000 kg (33,000 lbs.)
- Length of superstructure, min.: 420 cm (165")
- Overhang max.: 120 cm (47")
- Wheelbase min.: 360 cm (142")
- PTO drive hydraulic pressure: 160 - 200 bar (2,300 - 2,900 lbs/in²)
- oil flow: 50 - 80 l per minute (13 - 22 GPM)
Raised exhaust
- controls: manual hand valves

C Special Attachments please enquire



Optimal

optimal 1700






Tree Spade

Basic Machine:

upper rootball diameter, approx.	A	165 cm	(65")
rootball depth, approx.	B	100 cm	(39")
working height	C	208 cm	(82")
working width, gate closed	D	180 cm	(71")
working width, gate open	E	270 cm	(106")
clearance between open gate	F	110 cm	(43")
inner frame diameter	G	104 cm	(41")
weight, empty		2.400 kg	(5,280 lbs.)
volume of rootball, approx.		0,94 m ³	(33 FT ³)
number of blades		4	

Special Features

- telescopic blade cylinders
- self-lubricating bearings, abrasion-resistant

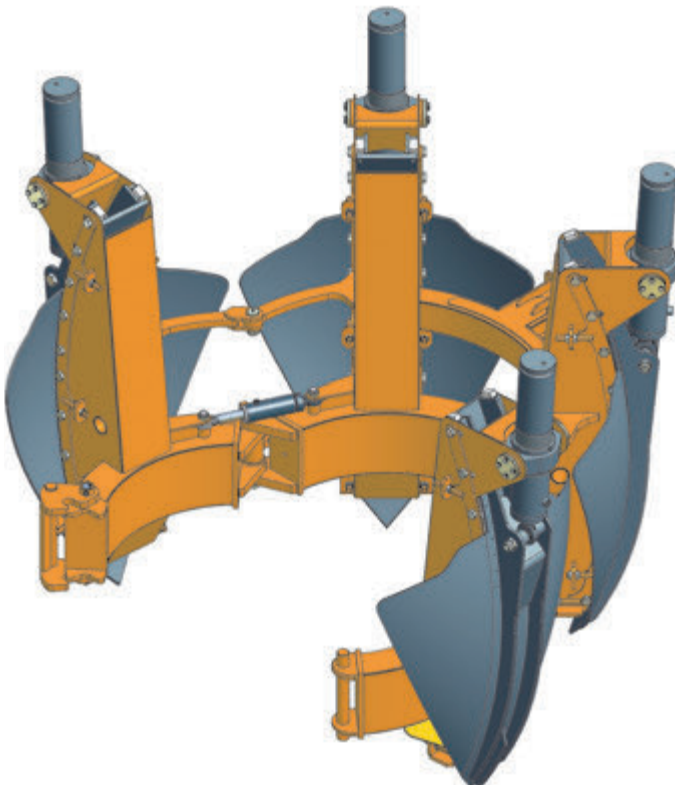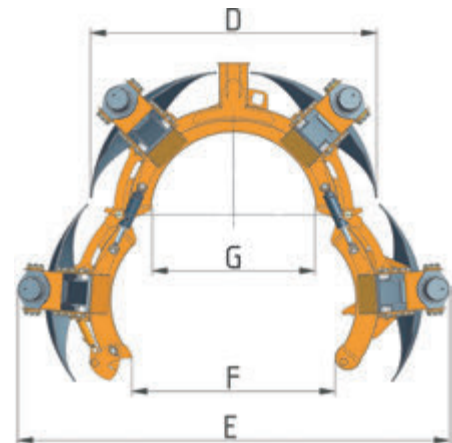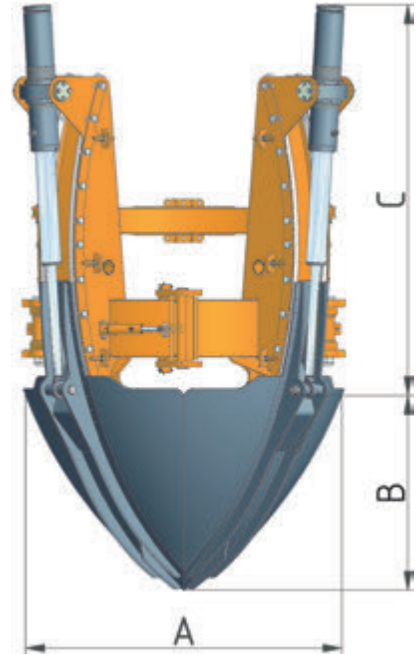

rotary control switch



Distributor:

Prichard's Nursery Equipment, LLC
 604 West Market Street
 P.O. Box 549
 Portland, TN 37148
 USA
 Phone: (423) 326-0753
 Fax: (615) 323-7667
 sales@optimaltreespades.com
 www.optimaltreespades.com



Manufacturer:

Optimal-Vertrieb Opitz GmbH
 Eysölden M 41
 91171 Thalmassing
 Germany
 Tel. + 49 91 73/79 18 0
 Fax. + 49 91 73/79 18 49
 info@opitz-optimal.com
 www.opitz-optimal.com

